LUX / FX

DESIGN PROFILE

Hyde 30

DRAWING



LW-AR3

COLOUR

FEATURES

- / Dimensions: Width 30.5mm x Height 10.9mm
- / Seamless continuous mounting
- / Available with opal, frosted and transparent diffusers
- / Available lengths: made to order
- / Made of anodized aluminium
- / Suitable for a variety of flexible led strips
- / Dimming options available
- / Interior recessed
- / IP 20 and 44 for indoors use only
- / End caps and mounting clips sold separately

LFX231030

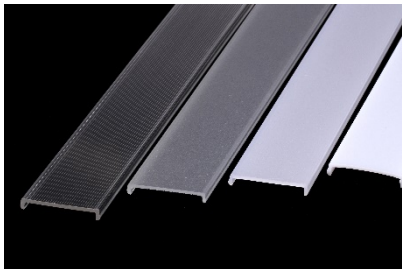

T 03 9416 6986
E info@luxfx.com.au
luxfx.com.au

LUX / FX

DESIGN PROFILE

Hyde 30

FLEXIBLE LED STRIPS
@ 3 MCADAM ELLIPSE STEPS

Product No.	Colour Temp	Led Chips /M	Power Density Watts/M	Colour Rendering	IP Rating	Lumens /W @ 25C. 24Vdc	Lumens /Metre @ 25C. 24Vdc
FLS5-W27.70-44		70	4.8	90>	IP44	95	450
FLS10-W27.70-44		70	9.6	90>	IP44	96	923
FLS15-W27.70-44		70	14.4	90>	IP44	96	1377
FLS5-W27.140.70-44	2700K	140	4.8	90>	IP20	125	600
FLS10-W27.140.70.44		140	9.6	90>	IP20	125	1200
FLS15-W27.140.70.44		140	14.4	90>	IP20	125	1800
FLS5-W30.70-44		70	4.8	90>	IP44	118	570
FLS10-W30.70-44		70	9.6	90>	IP44	108	1035
FLS15-W30.70-44		70	14.4	90>	IP44	104	1500
FLS5-W30.140.70-44	3000K	140	4.8	90>	IP20	125	600
FLS10-W30.140.70.44		140	9.6	90>	IP20	125	1200
FLS15-W30.140.70.44		140	14.4	90>	IP20	125	1800
FLS5-N40.70-44		70	4.8	90>	IP44	118	570
FLS10-N40.70-44		70	9.6	90>	IP44	108	1035
FLS15-N40.70-44		70	14.4	90>	IP44	104	1500
FLS5-N40.140.70-44	4000K	140	4.8	90>	IP20	125	600
FLS10-N40.140.70.44		140	9.6	90>	IP20	125	1200
FLS15-N40.140.70.44		140	14.4	90>	IP20	125	1800

luxfx.com.au

T 03 9416 6986
E info@luxfx.com.au