


# Professional recessed

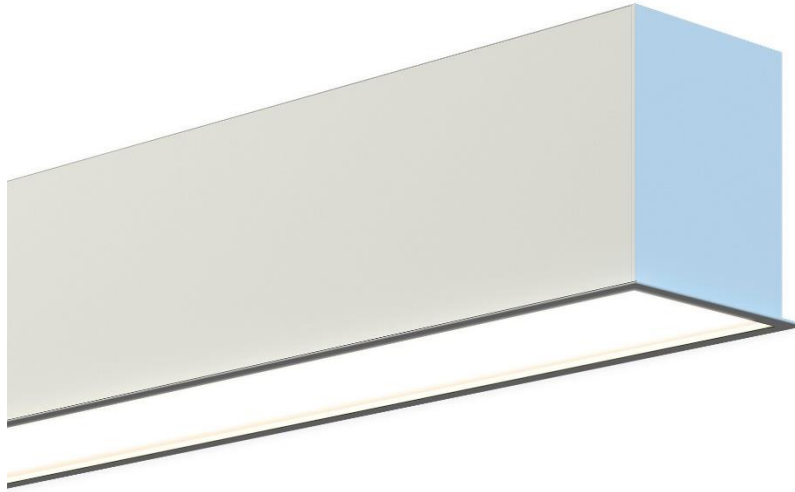

## TECHNICAL DATA

LLE24 GEN4 HE / HO

### OUTPUT PER 3 X 280 MM MODULES @ 840MM 4000K CCT

Number of boards	Rating	Forward current	Total wattage	Delivered Lumen Output
3 X 280mm HE modules	High Efficiency	300Ma	10.2	855
3 X 280mm HE modules	High Efficiency	350Ma	12.0	981
3 X 280mm HE modules	High Efficiency	400Ma	13.8	1107
3 X 280mm HE modules	High Efficiency	450Ma	15.6	1219
3 X 280mm HO modules	High Output	300Ma	20.4	1710
3 X 280mm HO modules	High Output	350Ma	24	1976
3 X 280mm HO modules	High Output	400Ma	27.6	2296
3 X 280mm HO modules	High Output	450Ma	31.5	2453

## FEATURES

- / Interior recessed
- / Seamless continuous mounting
- / High efficiency diffuser
- / Dimming options available
- / IP 20 for indoor use only
- / Finishes: Anodised, Black, White
- / Dimensions: 75mm (w) x 100mm (h)  
Lengths made to order

## COLOUR

