


Project

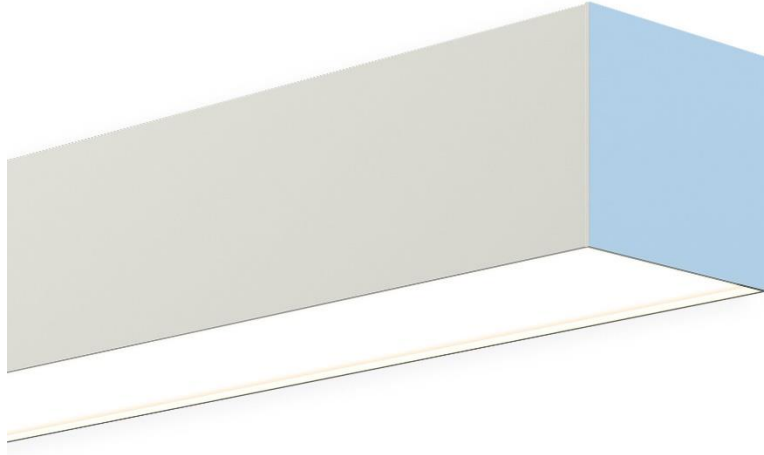

TECHNICAL DATA

LLE24 GEN4 HE / HO

OUTPUT PER 3 X 280 MM MODULES @ 840MM 4000K CCT

Number of boards	Rating	Forward current	Total wattage	Delivered Lumen Output
3 X 280mm HE modules	High Efficiency	300Ma	10.2	1211
3 X 280mm HE modules	High Efficiency	350Ma	12.0	1390
3 X 280mm HE modules	High Efficiency	400Ma	13.8	1569
3 X 280mm HE modules	High Efficiency	450Ma	15.6	1728
3 X 280mm HO modules	High Output	300Ma	20.4	2423
3 X 280mm HO modules	High Output	350Ma	24	2801
3 X 280mm HO modules	High Output	400Ma	27.6	3251
3 X 280mm HO modules	High Output	450Ma	31.5	3476

FEATURES

- / Interior recessed, surface mounted, suspended
- / Seamless continuous mounting
- / High efficiency diffuser
- / Dimming options available
- / IP 20 for indoor use only
- / Finishes: Anodised, Black, White
- / Dimensions: 80mm (w) x 85mm (h)
Lengths made to order

COLOUR

