LUX / FX

DESIGN PROFILE

Harrow Wall

DRAWING



COLOUR

FEATURES

- Dimensions: Width 42mm x Height 35mm
- Seamless continuous mounting
- Available with opal, frosted and transparent diffusers
- Made of anodizd aluminium
- Suitable for a variety of flexible LED strips
- Dimming options available
- Interior recessed / surface mounted
- IP20 and 44 for indoor use only
- End caps and mounting clips sold separately

ACCESSORIES

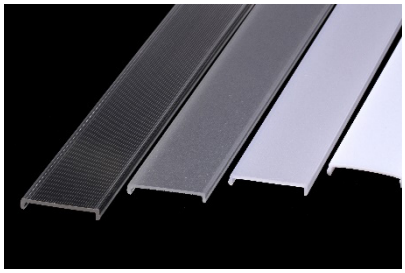

T 03 9417 6986
E info@luxfx.com.au
luxfx.com.au

Harrow Wall

FLEXIBLE LED STRIPS
@ 3 MACADAM ELLIPSE STEPS

Code	Colour Temp	LED Chips / meter	Watts / meter	Colour Rendering	IP Rating	Efficacy (lm/watt)	Lumens / meter
FLS5.27.140.20	2700K	140	5	> 90	IP20	110	548
FLS10.27.140.20		140	10	> 90	IP20	103	1028
FLS15.27.140.20		140	15	> 90	IP20	105	1471
FLS20.27.140.20		140	20	> 90	IP20	104	2070
FLS5.27.140.44		140	5	> 90	IP44	109	545
FLS10.27.140.44		140	10	> 90	IP44	102	1023
FLS15.27.140.44		140	15	> 90	IP44	101	1466
FLS20.27.140.44		140	20	> 90	IP44	103	2063
FLS5.30.140.20	3000K	140	5	> 90	IP20	110	570
FLS10.30.140.20		140	10	> 90	IP20	107	1071
FLS15.30.140.20		140	15	> 90	IP20	101	1522
FLS20.30.140.20		140	20	> 90	IP20	108	2156
FLS5.30.140.44		140	5	> 90	IP44	109	568
FLS10.30.140.44		140	10	> 90	IP44	106	1066
FLS15.30.140.44		140	15	> 90	IP44	105	1514
FLS20.30.140.44		140	20	> 90	IP44	106	2145
FLS5.40.140.20	4000K	140	5	> 90	IP20	110	608
FLS10.40.140.20		140	10	> 90	IP20	109	1157
FLS15.40.140.20		140	15	> 90	IP20	110	1644
FLS20.40.140.20		140	20	> 90	IP20	112	2328
FLS5.40.140.44		140	5	> 90	IP44	109	605
FLS10.40.140.44		140	10	> 90	IP44	108	1151
FLS15.40.140.44		140	15	> 90	IP44	110	1636
FLS20.40.140.44		140	20	> 90	IP44	110	2253

LUX / FX
luxfx.com.au
T 03 9417 6986
E info@luxfx.com.au