

Horizon

one au

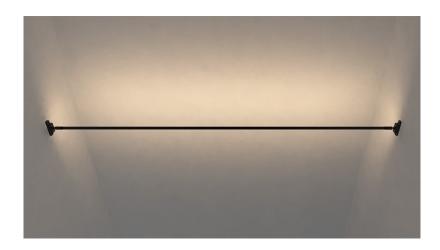



FEATURES

- Designed to mount between any two structural surfaces
- Rotate strip to achieve wall washing, direct lighting and more
- Integrates seamlessly with architecture







24V DC POWER SUPPLIES SOLD SEPARATELY








Protection

50mm Cutting Increment

EXAMPLE APPLICATIONS



COLOUR TEMPERATURES

2700K □ 3000K □ 4000K □

LENGTHS

6m □ 12m □ 20m □

DIMMING OPTIONS

ACCESSORIES







Strip Cutters

OUTPUTS - STANDARD LED

Colour Temp	Watts/m	CRI	Lm/w	Lm/m
2700K	9.6	>90	95	911
3000K	9.6	>90	100	960
4000K	9.6	>90	104	998

OUTPUTS - COB LED

Colour Temp	Watts/m	CRI	Lm/w	Lm/m
2700K	9.6	>90	86	820
3000K	9.6	>90	94	900
4000K	9.6	>90	102	980