

# Loop Omni 15




## COLOUR TEMPERATURES

- |       |                          |        |                          |
|-------|--------------------------|--------|--------------------------|
| 2800K | <input type="checkbox"/> | RED    | <input type="checkbox"/> |
| 3200K | <input type="checkbox"/> | GREEN  | <input type="checkbox"/> |
| 4400K | <input type="checkbox"/> | BLUE   | <input type="checkbox"/> |
|       |                          | YELLOW | <input type="checkbox"/> |





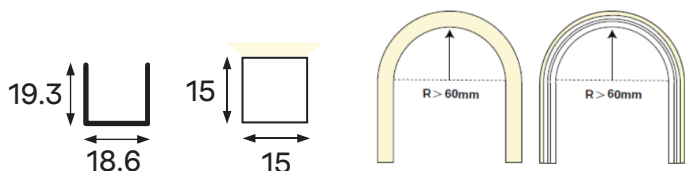

## DIMMING OPTIONS

- DALI  PLEASE SPECIFY  
 0-10V   
 Other



## FEATURES

- Able to bend along any axis
- Flame, saltwater, solvent & UV-resistant silicone construction
- Suitable for indoor or outdoor installation







 Max 5 meter lengths	 41.6mm cutting increments	 24V DC POWER SUPPLIES SOLD SEPARATELY
 IP67 Ingress Protection	 IK08 Impact Protection	 Min. Bend Radius 60mm

## OUTPUTS

Colour Temp	Watts/m	CRI	Lm/w	Lm/m
2800K	7.2	>80	75	542
3200K	7.2	>80	77	557
4400K	7.2	>80	78	563
Red	7.2			
Green	7.2			
Blue	7.2			
Yellow	7.2			

## ACCESSORIES

ALL ACCESSORIES SOLD SEPARATELY

 End Caps: End, Bottom, Side Cable	 Flexible Mounting Channel	 IP68 Cable Glands
 Mounting Profile 18.6W x 19.3H	 Mounting Clips 18.6W x 19.3H	 End-to-End Connectors

## DISTRIBUTION

