


Premium RECESSED

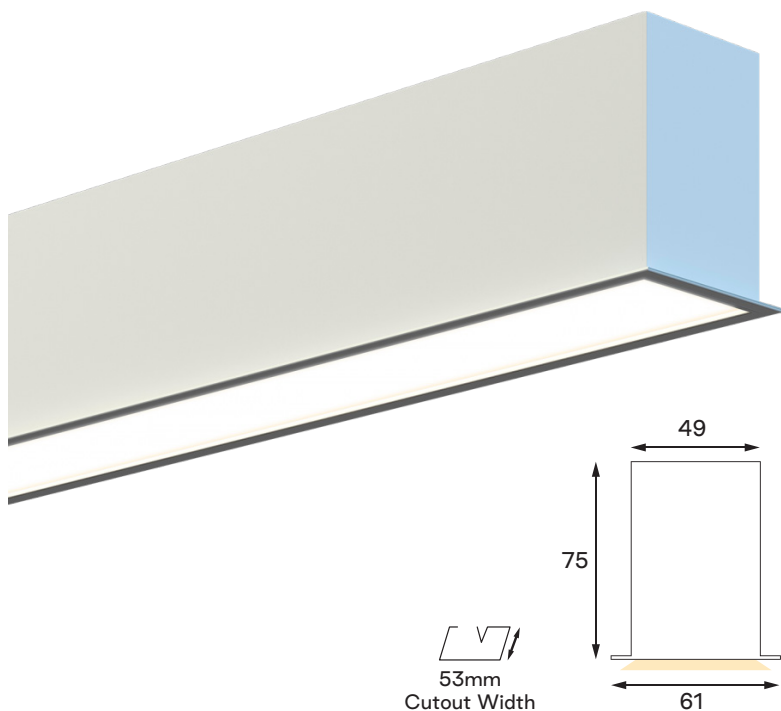

COLOUR TEMPERATURE

- 2700K
- 3000K
- 4000K
- Tuneable White
- RGBW

DIMMING OPTIONS

- DALI
 - 0-10V
 - Bluetooth
 - Other
- PLEASE SPECIFY

FINISHES

- Black
- White
- Anodized Aluminium
- Custom




PLEASE SPECIFY COLOUR

FEATURES

- Designed for recessed installation
- Purpose-made diffusers using a unique optic recipe
- Lengths made to order to suit your project
- Joinable in up to max 3m module lengths
- Incorporates industry-leading LED light sources
- IP20 rated

DIFFUSED OUTPUTS

LLE GEN5 HE/HO

| | LED Modules | Operation | Forward Current | Total Wattage | Delivered Lumens |
|---|--------------|-----------------|-----------------|---------------|------------------|
|  3 LED Modules | 3 x 280mm HE | High Efficiency | 300mA | 11.1 | 1032 |
| | 3 x 280mm HE | High Efficiency | 350mA | 13.1 | 1195 |
|  3000K CCT | 3 x 280mm HE | High Efficiency | 400mA | 15.1 | 1371 |
| | 3 x 280mm HE | High Efficiency | 450mA | 17.1 | 1527 |
|  875mm Luminaire | 3 X 280mm HO | High Output | 300mA | 22.2 | 2064 |
| | 3 X 280mm HO | High Output | 350mA | 26.2 | 2390 |
| | 3 X 280mm HO | High Output | 400mA | 30.2 | 2742 |
| | 3 X 280mm HO | High Output | 450mA | 34.2 | 3054 |