


Project COMFORT

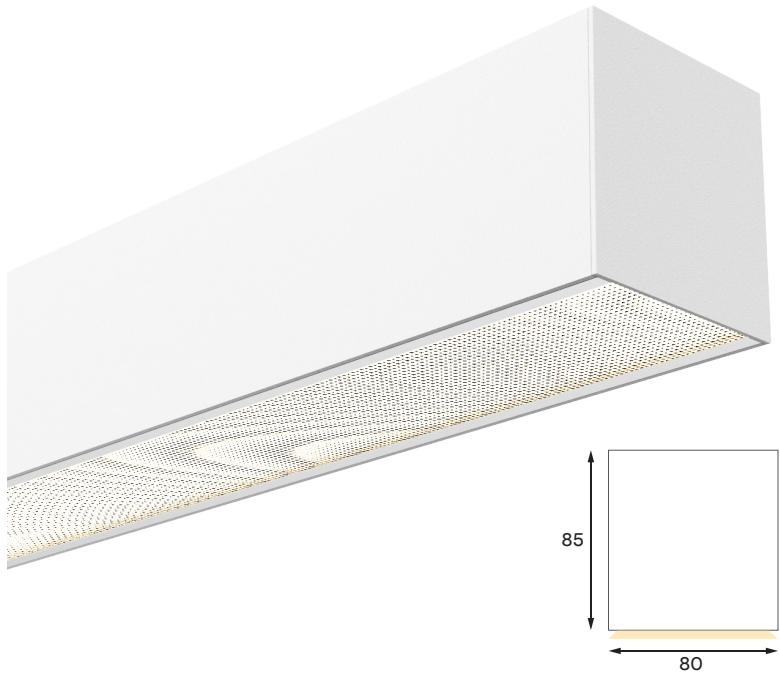

FEATURES

- Designed for suspended or surface-mounted installation
- Low-glare prismatic diffuser for higher visual comfort
- Lengths made to order to suit your project
- Joinable in up to max 3m module lengths
- Incorporates industry-leading LED light sources
- IP20 rated

OUTPUTS

LLE GEN4 HE/HO

	LED Modules	Operation	Forward Current	Total Wattage	Delivered Lumens
3 LED Modules	3 x 280mm HE	High Efficiency	300mA	11.1	1017
4000K CCT	3 x 280mm HE	High Efficiency	350mA	13.1	1178
	3 x 280mm HE	High Efficiency	400mA	15.1	1351
	3 x 280mm HE	High Efficiency	450mA	17.1	1505
875mm Luminaire	3 x 280mm HO	High Output	300mA	22.2	2034
	3 x 280mm HO	High Output	350mA	26.2	2355
	3 x 280mm HO	High Output	400mA	30.2	2702
	3 x 280mm HO	High Output	450mA	34.2	3010

COLOUR TEMPERATURE

- 2700K
 3000K
 4000K
 Tuneable White

MOUNTING

- Suspended
 Surface

DIMMING OPTIONS

- DALI
 0-10V
 Bluetooth
 Other PLEASE SPECIFY

FINISHES

- | | |
|--|---------------------------------|
| | <input type="checkbox"/> Black |
| | <input type="checkbox"/> White |
| | <input type="checkbox"/> Custom |

PLEASE SPECIFY COLOUR

Project COMFORT

Glare Evaluation According to UGR

Reflectances											
Ceiling Cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Working Plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Shape		Viewed Crosswise					Viewed Endwise				
x = 2H	y = 2H	18.7	19.8	19.0	20.0	20.2	18.8	19.9	19.1	20.2	20.4
2H	3H	19.0	20.0	19.3	20.3	20.5	19.3	20.3	19.6	20.6	20.8
2H	4H	19.1	20.0	19.4	20.3	20.6	19.5	20.4	19.8	20.7	21.0
2H	6H	19.1	20.0	19.5	20.3	20.6	19.6	20.5	20.0	20.8	21.1
2H	8H	19.1	19.9	19.5	20.2	20.5	19.6	20.5	20.0	20.8	21.1
2H	12H	19.1	19.9	19.5	20.2	20.5	19.6	20.4	20.0	20.7	21.0
4H	2H	18.9	19.8	19.2	20.1	20.3	19.0	19.9	19.3	20.2	20.5
4H	3H	19.3	20.1	19.7	20.4	20.8	19.6	20.4	20.0	20.7	21.1
4H	4H	19.5	20.2	19.8	20.5	20.9	19.9	20.6	20.3	20.9	21.3
4H	6H	19.5	20.1	19.9	20.5	20.9	20.1	20.7	20.5	21.1	21.4
4H	8H	19.5	20.1	20.0	20.5	20.9	20.1	20.7	20.5	21.1	21.5
4H	12H	19.5	20.0	19.9	20.4	20.9	20.1	20.6	20.5	21.0	21.4
8H	4H	19.5	20.1	19.9	20.5	20.9	19.9	20.5	20.3	20.9	21.3
8H	6H	19.6	20.1	20.1	20.5	21.0	20.1	20.6	20.6	21.0	21.5
8H	8H	19.6	20.0	20.1	20.5	21.0	20.2	20.6	20.7	21.0	21.5
8H	12H	19.6	20.0	20.1	20.4	20.9	20.2	20.5	20.7	21.0	21.5
12H	4H	19.5	20.0	19.9	20.4	20.8	19.9	20.4	20.3	20.8	21.2
12H	6H	19.6	20.0	20.1	20.5	20.9	20.1	20.5	20.6	21.0	21.4
12H	8H	19.6	20.0	20.1	20.4	20.9	20.2	20.5	20.7	21.0	21.5
Variations with the observer position at spacings:											
S = 1H		0.5 / -1.4					0.6 / -1.3				
1.5H		1.6 / -2.3					1.6 / -1.8				
2H		3.1 / -3.1					3.0 / -2.5				