


Project COMFORT RECESSED

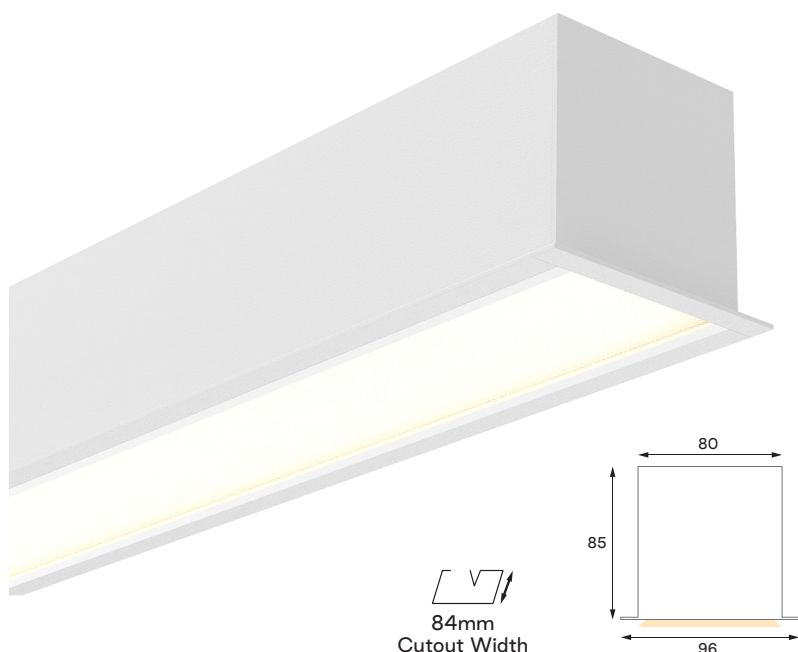

COLOUR TEMPERATURE

- 2700K
- 3000K
- 4000K
- Tuneable White

MOUNTING

- Suspended
- Surface

DIMMING OPTIONS

- DALI
 - 0-10V
 - Bluetooth
 - Other
- PLEASE SPECIFY

FINISHES




- Black
 - White
 - Custom
- PLEASE SPECIFY COLOUR

FEATURES

- Designed for suspended or surface-mounted installation
- Low-glare prismatic diffuser for higher visual comfort
- Lengths made to order to suit your project
- Joinable in up to max 3m module lengths
- Incorporates industry-leading LED light sources
- IP20 rated

OUTPUTS

LLE GEN4 HE/HO

	LED Modules	Operation	Forward Current	Total Wattage	Delivered Lumens
 3 LED Modules	3 x 280mm HE	High Efficiency	300mA	11.1	1017
	3 x 280mm HE	High Efficiency	350mA	13.1	1178
 4000K CCT	3 x 280mm HE	High Efficiency	400mA	15.1	1351
	3 x 280mm HE	High Efficiency	450mA	17.1	1505
	3 x 280mm HO	High Output	300mA	22.2	2034
	3 x 280mm HO	High Output	350mA	26.2	2355
 875mm Luminaire	3 x 280mm HO	High Output	400mA	30.2	2702
	3 x 280mm HO	High Output	450mA	34.2	3010

Project COMFORT RECESSED

Glare Evaluation According to UGR

Reflectances										
Ceiling Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Working Plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Shape	Viewed Crosswise					Viewed Endwise				
x = 2H y = 2H	18.7	19.8	19.0	20.0	20.2	18.8	19.9	19.1	20.2	20.4
2H 3H	19.0	20.0	19.3	20.3	20.5	19.3	20.3	19.6	20.6	20.8
2H 4H	19.1	20.0	19.4	20.3	20.6	19.5	20.4	19.8	20.7	21.0
2H 6H	19.1	20.0	19.5	20.3	20.6	19.6	20.5	20.0	20.8	21.1
2H 8H	19.1	19.9	19.5	20.2	20.5	19.6	20.5	20.0	20.8	21.1
2H 12H	19.1	19.9	19.5	20.2	20.5	19.6	20.4	20.0	20.7	21.0
4H 2H	18.9	19.8	19.2	20.1	20.3	19.0	19.9	19.3	20.2	20.5
4H 3H	19.3	20.1	19.7	20.4	20.8	19.6	20.4	20.0	20.7	21.1
4H 4H	19.5	20.2	19.8	20.5	20.9	19.9	20.6	20.3	20.9	21.3
4H 6H	19.5	20.1	19.9	20.5	20.9	20.1	20.7	20.5	21.1	21.4
4H 8H	19.5	20.1	20.0	20.5	20.9	20.1	20.7	20.5	21.1	21.5
4H 12H	19.5	20.0	19.9	20.4	20.9	20.1	20.6	20.5	21.0	21.4
8H 4H	19.5	20.1	19.9	20.5	20.9	19.9	20.5	20.3	20.9	21.3
8H 6H	19.6	20.1	20.1	20.5	21.0	20.1	20.6	20.6	21.0	21.5
8H 8H	19.6	20.0	20.1	20.5	21.0	20.2	20.6	20.7	21.0	21.5
8H 12H	19.6	20.0	20.1	20.4	20.9	20.2	20.5	20.7	21.0	21.5
12H 4H	19.5	20.0	19.9	20.4	20.8	19.9	20.4	20.3	20.8	21.2
12H 6H	19.6	20.0	20.1	20.5	20.9	20.1	20.5	20.6	21.0	21.4
12H 8H	19.6	20.0	20.1	20.4	20.9	20.2	20.5	20.7	21.0	21.5
Variations with the observer position at spacings:										
S = 1H	0.5 / -1.4					0.6 / -1.3				
1.5H	1.6 / -2.3					1.6 / -1.8				
2H	3.1 / -3.1					3.0 / -2.5				