


Twin Track

one'au

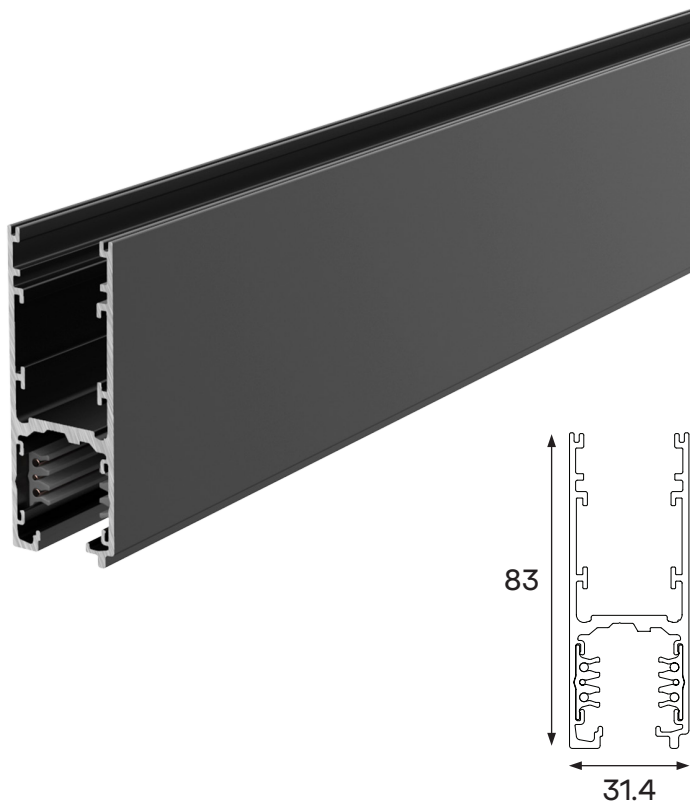

FEATURES

- Integrated uplight with provision for integral control gear
- Six conductors for compatibility with a range of dimming systems
- Able to be suspended with track side up or down
- Provided in kit form for assembly on installation
- Available with pre-wired integral control gear



STANDARD LENGTHS

1000mm

2000mm

3000mm

UPLIGHT LED

	5w	10w	15w	20w
2700K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3000K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4000K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

IP20 ☐ Standard unless otherwise indicated
IP44 ☐

UPLIGHT DIFFUSER

Opal ☐ Standard unless otherwise indicated
 Transparent ☐

FINISHES

☐ Black
 ☐ White

MOUNTING

Surface ☐
Suspended ☐

UPLIGHT DIMMING OPTIONS

DALI ☐

ACCESSORIES

All accessories sold separately



Live Ends



End Caps



Suspensions



Cover Strips



Straight Connector



3-Way Connector



4-Way Connector



Flexible Connector



Inline Connector



Protruding Diffuser



Flush Diffuser