



# Harrow Contour

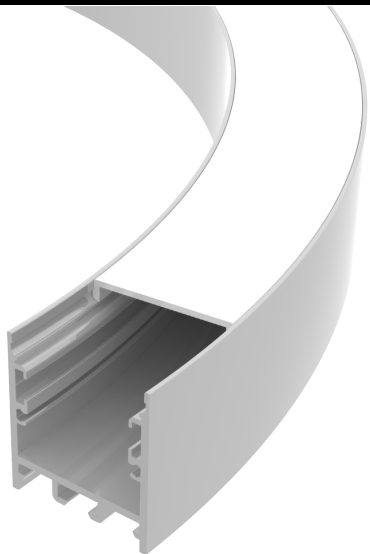

## LEDs IP20

	5w	15w
2200K	<input type="checkbox"/>	<input type="checkbox"/>
2700K	<input type="checkbox"/>	<input type="checkbox"/>
3000K	<input type="checkbox"/>	<input type="checkbox"/>
4000K	<input type="checkbox"/>	<input type="checkbox"/>
6500K	<input type="checkbox"/>	<input type="checkbox"/>

## DIMMING OPTIONS

DALI  
 0-10V  
 Phase  
 Other

PLEASE SPECIFY

24V DRIVERS SOLD SEPARATELY

## FEATURES

- Minimum 400mm curve radius, with maximums well over 2 meters
- Can be installed as surface-mount or suspended
- Clip-in diffuser for ease of install
- Lengths and custom shapes made to order



Supplied ready to connect



24V DC



Curved to order

## ACCESSORIES



End Caps



Suspension Kits



Mounting Clips

## FINISHES

Black  
 White  
 Anodized Aluminium  
 Custom

PLEASE SPECIFY COLOUR

## DIFFUSERS

Opal Standard unless otherwise indicated  
 Frosted  
 Transparent

# Harrow Contour

## LED STRIP OUTPUTS

Code	Colour Temp	Watts/m	LEDs/m	CRI	IP Rating	Lm/m
S-FLS5.22.60.20	2200K	5	60	>90	IP20	408
S-FLS5.27.60.20	2700K	5	60	>90	IP20	421
S-FLS5.30.60.20	3000K	5	60	>90	IP20	434
S-FLS5.27.60.20	4000K	5	60	>90	IP20	447
S-FLS5.27.60.20	6500K	5	60	>90	IP20	460
S-FLS15.22.60.20	2200K	15	60	>90	IP20	1120
S-FLS15.27.60.20	2700K	15	60	>90	IP20	1153
S-FLS15.30.60.20	3000K	15	60	>90	IP20	1184
S-FLS15.27.60.20	4000K	15	60	>90	IP20	1217
S-FLS15.27.60.20	6500K	15	60	>90	IP20	1250

### Rings & Custom Shapes

Variable & made to order.  
Larger shapes made in sections.

