


Loop 360

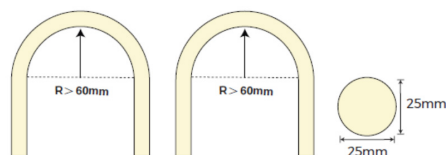

FEATURES

- Bends along any axis with 360-degree emittance
- Flame, saltwater, solvent & UV-resistant silicone construction
- Suitable for indoor or outdoor installation

 Max 5 meter lengths	 41.6mm cutting increments	 24V DC POWER SUPPLIES SOLD SEPARATELY
 IP65 Ingress Protection	 IK08 Impact Protection	 Min. Bend Radius 60mm

OUTPUTS

Colour Temp	Watts/m	CRI	Lm/w	Lm/m
2700K	14.4	>95	58	840
3000K	14.4	>95	59	850
4000K	14.4	>95	65	931

COLOUR TEMPERATURES

- 2700K
- 3000K
- 4000K

DIMMING OPTIONS

- DALI PLEASE SPECIFY
- 0-10V
- Other

ACCESSORIES

ALL ACCESSORIES SOLD SEPARATELY



End Caps:
Top, Side & Bottom Cable



IP68
Cable Glands



Clear Surface
Clips
51.6W x 26.8H



Clear Mounting
Profile
26W x 21.5H



Pendant Kit

DISTRIBUTION

