


Prevail 54 RECESSED

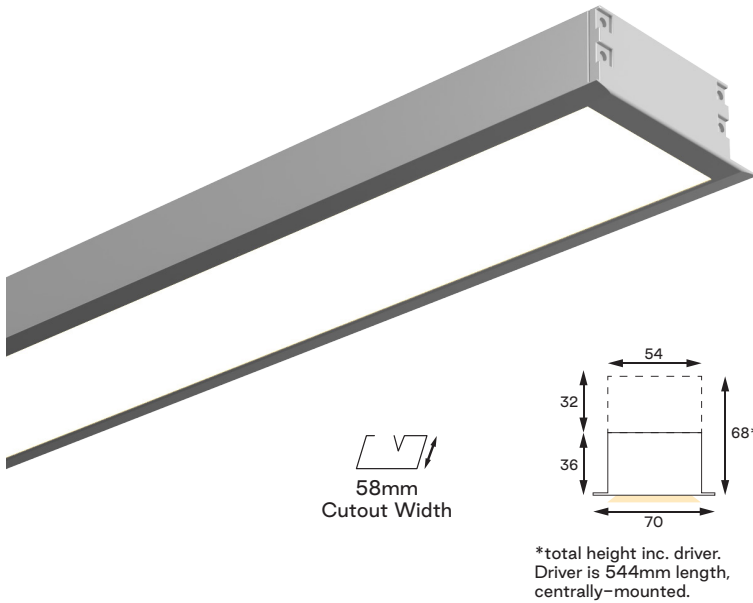

COLOUR TEMPERATURE

- 2700K
- 3000K
- 4000K
- Tuneable White

DIMMING OPTIONS

- DALI
 - 0-10V
 - Other
- PLEASE SPECIFY

FINISHES

- Black
- White
- Anodized Aluminium


OPTICS

- Diffused STANDARD UNLESS INDICATED OTHERWISE
- UGR < 19

FEATURES

- Suitable for recessed installation
- Choice of diffused or low-glare (UGR<19) optics
- Continuously joinable
- Supplied ready to connect

STANDARD MODULE LENGTHS

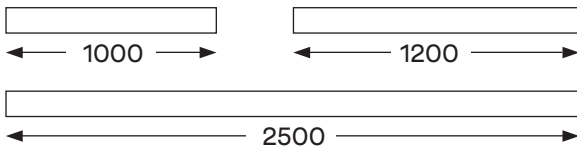

CONNECTIONS



Four-way junctions, standard corners and both inner and outer diffused corners available

DIFFUSED OUTPUTS

1000mm Luminaire	Colour Temp	CRI	Watts	Delivered Lumens
	2700K	80	23	2457
	3000K	80	23	2546
	4000K	80	23	2738