DOWNLIGHT RANGE

Connect RM ADJUSTABLE

one·au·

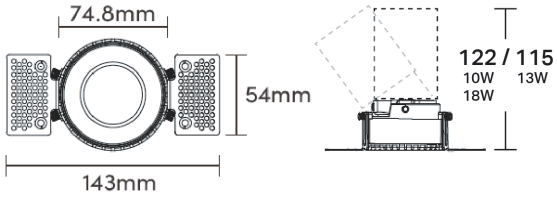

FEATURES

- Modular low-glare optics provide comfort at a variety of beam angles
- Both 240V and low voltage options available
- Adjustable gimbal for precise illumination
- Plaster-over installation for a perfect trimless appearance

AC or DC Input | 30° Adjustment | 78mm Cutout | CRI | 3 MacAdam Step Consistency

OUTPUTS

Watts	Input	Colour Temp	Flux (lm)
10	240V AC	2700K 3000K 4000K	900
13	300mA DC	2700K 3000K 4000K	1100
18	420mA DC	2700K 3000K 4000K	1400

BAFFLE FINISHES

☐ Matte Black
☐ Matte White

COLOUR TEMPERATURES

2700K ☐
3000K ☐
4000K ☐

BEAM ANGLES

18° ☐ Low Glare
28° ☐ Low Glare
38° ☐ Low Glare
50° ☐ Low Glare

WATTAGES

10W ☐ 240V AC input

13W ☐ 300mA DC input
18W ☐ 420mA DC input

Drivers sold separately

DIMMING OPTIONS

DALI ☐
0-10V ☐
Phase ☐
Other ☐ PLEASE SPECIFY

Note: Only Phase-dim available with 10W 240V lamps

ACCESSORIES

☐ Elliptical Lens
☐ Honeycomb
☐ Softening Lens
☐ IP44 Plastic Cover

info@luxfx.com.au
03 9417 6986

Connect RM ADJUSTABLE

one·au·

Unified Glare Rating Table

Reflectances											
Ceiling Cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Working Plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Shape		Viewed Crosswise					Viewed Endwise				
x = 2H	y = 2H	14.9	15.6	15.1	15.8	15.9	14.9	15.6	15.1	15.8	15.9
2H	3H	14.8	15.4	15.0	15.6	15.8	14.8	15.4	15.0	15.6	15.8
2H	4H	14.7	15.3	15.0	15.5	15.8	14.7	15.3	15.0	15.5	15.8
2H	6H	14.6	15.2	15.0	15.4	15.7	14.6	15.2	15.0	15.4	15.7
2H	8H	14.6	15.1	14.9	15.4	15.7	14.6	15.1	14.9	15.4	15.7
2H	12H	14.6	15.1	14.9	15.4	15.7	14.6	15.1	14.9	15.4	15.7
4H	2H	14.7	15.3	15.0	15.5	15.8	14.7	15.3	15.0	15.5	15.8
4H	3H	14.6	15.0	14.9	15.3	15.7	14.6	15.0	14.9	15.3	15.7
4H	4H	14.5	14.9	14.8	15.2	15.6	14.5	14.9	14.8	15.2	15.6
4H	6H	14.4	14.8	14.8	15.2	15.5	14.4	14.8	14.8	15.2	15.5
4H	8H	14.4	14.7	14.8	15.1	15.5	14.4	14.7	14.8	15.1	15.5
4H	12H	14.4	14.7	14.8	15.1	15.5	14.4	14.7	14.8	15.1	15.5
8H	4H	14.3	14.7	14.8	15.1	15.5	14.3	14.7	14.8	15.1	15.5
8H	6H	14.3	14.6	14.7	15.0	15.5	14.3	14.6	14.7	15.0	15.5
8H	8H	14.3	14.5	14.7	15.0	15.4	14.3	14.5	14.7	15.0	15.4
8H	12H	14.3	14.5	14.8	15.0	15.5	14.3	14.5	14.8	15.0	15.5
12H	4H	14.3	14.6	14.7	15.0	15.4	14.3	14.6	14.7	15.0	15.4
12H	6H	14.2	14.5	14.7	14.9	15.4	14.2	14.5	14.7	14.9	15.4
12H	8H	14.2	14.5	14.7	14.9	15.4	14.2	14.5	14.7	14.9	15.4

Variations with the observer position at spacings:		
S = 1H	5.3 / -9.6	5.3 / -9.6
1.5H	8.1 / -9.9	8.1 / -9.9
2H	10.1 / -10.0	10.1 / -10.0

Adove data for 38° distribution

info@luxfx.com.au
03 9417 6986