


# Alta 40

## A40



Surface Mount



Suspension Mount

## FEATURES

- Modular design allows for flexible and seamless lighting solutions – simply plug and play.
- Tool-free installation increases efficiency and disassembly for easy maintenance.
- Single-point power entry up to 40m long.
- Flexible diffusers are available in 20m/50m reels for seamless continuous lighting.
- 2.5m standard profile length. Custom lengths upon request.



Modular Design



Supplied Kit Form



Standard 2.5m Length



IP20 Protection



Indoor Application

## MODULES



Diffuser



Spotlight



Prismatic



Recessed Downlight



Louver



Honeycomb



Grille

## LENGTH

- 2500mm PLEASE SPECIFY
- Custom

## FINISH

-  Black
-  White
-  Custom

PLEASE SPECIFY

## ACCESSORIES



Splice Connector



Suspension Kit



Ceiling Mount



Blind Cover



Flexible Diffuser

## CORNER ACCESSORIES


All corner accessories come with a blind cover



L60 (Down)



Y120 (Down)

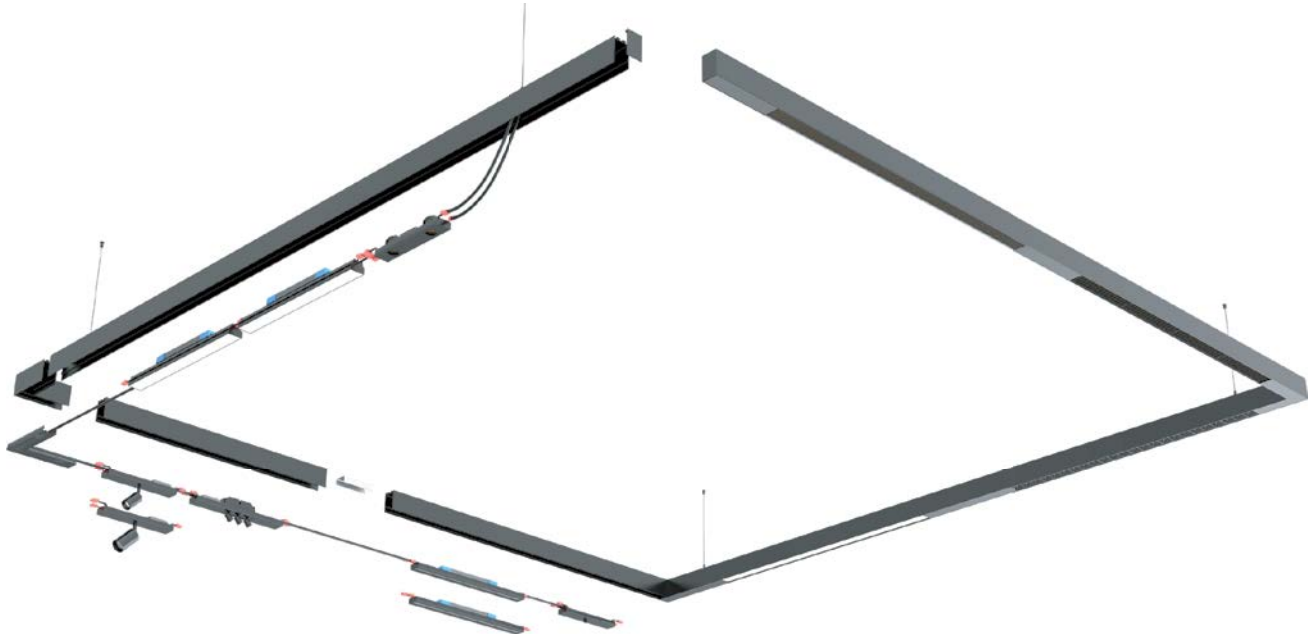

## PROFILE LENGTH FOR MODULES



A40FD A40FP A40HP A40BD	A40G	A40S-42WA A40S-25RB
600 mm	574 mm	
1196 mm	144 mm	
1494 mm	1524 mm	404 mm
1792 mm	1714 mm	
2388 mm	2284 mm	

Calculate the required length of the profile according to the table. Module length indicates the length of the profile and the thickness of two end caps, where each end cap is 2mm thick.

# Alta 40

## DIFFUSED

A40FD

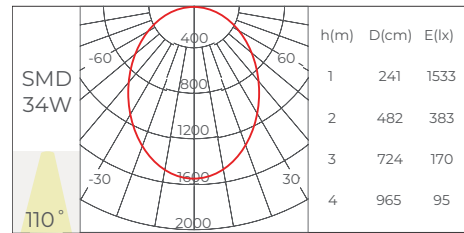

### COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K\*
- 4000K
- 5000K\*
- 6500K

\*STANDARD CCT 3000K & 4000K. OTHER CCT UPON REQUEST.  
\*NOT AVAILABLE IN HIGH-EFFICIENT LED

### FEATURES

- Power supply included.
- Standard (S) and High-Efficient (HE) LED options.
- German-quality flexible diffuser option in 20m/50m reels for seamless continuous lighting; provides leak-proof, ultra-long application with uniform diffused light.



AC Input Voltage



SDCM <3



IP20 Protection



LED Lifetime >60,000h



Continuous Diffuser

### DIFFUSER

- Fixed Diffuser Module
- Continuous Diffuser Reel

\*CONTINUOUS DIFFUSER REEL OPTION ONLY AVAILABLE FOR THE 600MM & 2400MM MODULES

### PARAMETERS

Length	Power	Lumen (S)	Lumen (HE)
600 mm	17 W	1870 lm	2210 lm
1196 mm	34 W	3740 lm	4420 lm
1494 mm	46 W	5060 lm	5980 lm
1792 mm	51 W	5610 lm	6630 lm
2388 mm	68 W	7480 lm	8840 lm

- Physical specifications according to 4000K and Ra80, in a white finish.
- Module length indicates the length of the profile and the thickness of two end caps, where each end cap is 2mm thick.
- The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
- Lumen maintenance report and IES files upon request.
- The luminous flux of the black finish is 82% of the white finish.

### COLOUR RENDERING

- CRI >80
- CRI >90

### LED EFFICACY

- S 110 lm/W
- HE 130 lm/W

### DIMMING

- ON/OFF
- DALI
- 0-10V
- Other

PLEASE SPECIFY

### FINISH

-  Black
-  White
-  Custom

PLEASE SPECIFY

### LENGTH (MM)


- 600
- 1200
- 1500
- 1800
- 2400

\*CONTINUOUS DIFFUSER REEL OPTION ONLY AVAILABLE FOR THE 600MM & 2400MM MODULES

# Alta 40

## PRISMATIC

A40FP



### FEATURES

- Power supply included.
- Standard (S) and High-Efficient (HE) LED options.
- BrightView Technologies prismatic lens and diffusion film assembly to achieve diffused low-glare lighting.



AC Input Voltage



SDCM <3



IP20 Protection



LED Lifetime >60,000h




Low Glare UGR <19

### PARAMETERS

Length	Power	Lumen (S)	Lumen (HE)
600 mm	14 W	1260 lm	1680 lm
1196 mm	28 W	2520 lm	3360 lm
1494 mm	34 W	3060 lm	4080 lm
1792 mm	40 W	3600 lm	4800 lm

1. Physical specifications according to 4000K and Ra80, in a white finish.
2. Module length indicates the length of the profile and the thickness of two end caps, where each end cap is 2mm thick.
3. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
4. Lumen maintenance report and IES files upon request.
5. The luminous flux of the black finish is 84% of the white finish.

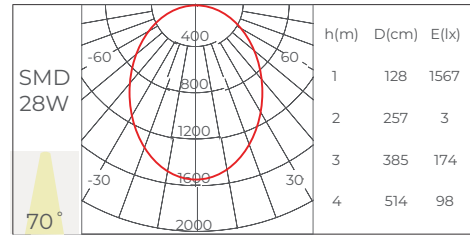

### COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K\*
- 4000K
- 5000K\*
- 6500K

\*STANDARD CCT 3000K & 4000K. OTHER CCT UPON REQUEST.  
\*NOT AVAILABLE IN HIGH-EFFICIENT LED

### COLOUR RENDERING

- CRI >80
- CRI >90

### LED EFFICACY

- S 90 lm/W
- HE 120 lm/W

### DIMMING

- ON/OFF
- DALI
- 0-10V
- Other

PLEASE SPECIFY

### FINISH

-  Black
-  White
-  Custom

PLEASE SPECIFY


### LENGTH (MM)

- 600
- 1200
- 1500
- 1800

# Alta 40

## HONEYCOMB

A40HP



### FEATURES

- Power supply included.
- BrightView Technologies prismatic lens and honeycomb assembly, with >30° shielding angle for soft and uniform low glare lighting.



AC Input Voltage



SDCM <3



IP20 Protection



LED Lifetime >60,000h




Low Glare UGR<19

### PARAMETERS

Length	Power	Lumen	Efficacy
600 mm	17 W	1275 lm	75 lm/W
1196 mm	34 W	2550 lm	
1494 mm	46 W	3450 lm	
1792 mm	51 W	3825 lm	
2388 mm	68 W	5100 lm	

1. Physical specifications according to 4000K and Ra80, in a white finish.
2. Module length indicates the length of the profile and the thickness of two end caps, where each end cap is 2mm thick.
3. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
4. Lumen maintenance report and IES files upon request.
5. The luminous flux of the black finish is 55% of the white finish.

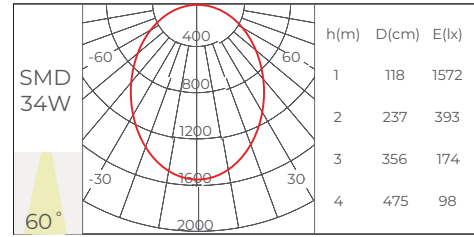

### COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 6500K

^STANDARD CCT 3000K & 4000K. OTHER CCT UPON REQUEST.

### COLOUR RENDERING

- CRI >80
- CRI >90

### DIMMING

- ON/OFF
- DALI
- 0-10V
- Other

PLEASE SPECIFY

### FINISH

-  Black
-  White
-  Custom

PLEASE SPECIFY


### LENGTH (MM)

- 600
- 1200
- 1500
- 1800
- 2400

# Alta 40

## LOUVER

A40BD



### FEATURES

- Power supply included.
- BrightView Technologies prismatic lens and louver assembly, with >30° shielding angle for soft and uniform low glare lighting.



AC Input Voltage



SDCM <3



IP20 Protection



LED Lifetime >60,000h




Low Glare UGR<19

### PARAMETERS

Length	Power	Lumen	Efficacy
600 mm	14 W	910 lm	65 lm/W
1196 mm	28 W	1820 lm	
1494 mm	34 W	2210 lm	
1792 mm	40 W	2600 lm	
2388 mm	56 W	3640 lm	

1. Physical specifications according to 4000K and Ra80, in a white finish.
2. Module length indicates the length of the profile and the thickness of two end caps, where each end cap is 2mm thick.
3. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
4. Lumen maintenance report and IES files upon request.
5. The luminous flux of the black finish is 84% of the white finish.

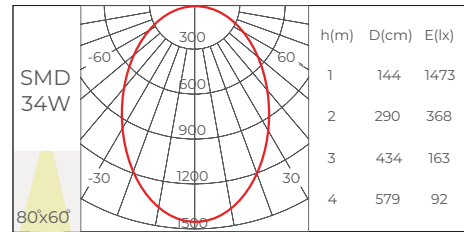

### COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 6500K

^STANDARD CCT 3000K & 4000K. OTHER CCT UPON REQUEST.

### COLOUR RENDERING

- CRI >80
- CRI >90

### DIMMING

- ON/OFF
- DALI
- 0-10V
- Other

PLEASE SPECIFY

### FINISH

- Black
- White
- Custom

PLEASE SPECIFY

### LENGTH (MM)



- 600
- 1200
- 1500
- 1800
- 2400



# Alta 40

## GRILLE

A40G

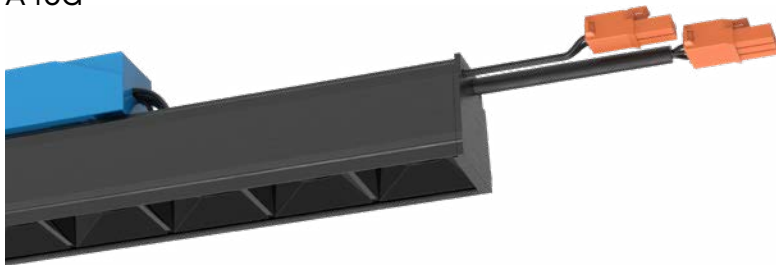

### FEATURES

- Power supply included.
- Grille module with precise light control, highly efficient lumen output and >45° shielding angle for low glare lighting.
- Three beam angle options with various UGR values.



AC Input Voltage



SDCM <3



IP20 Protection



LED Lifetime >60,000h




Low Glare Design

### PARAMETERS

Length	Power	Lumen	Efficacy
574 mm	15 W	1500 lm	100 lm/W
1144 mm	30 W	3000 lm	
1524 mm	40 W	4000 lm	
1714 mm	44 W	4400 lm	
2284 mm	60 W	6000 lm	

1. Physical specifications according to 4000K, Ra80, and 30° beam angle.
2. Module length indicates the length of the profile and the thickness of two end caps, where each end cap is 2mm thick.
3. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
4. Lumen maintenance report and IES files upon request.

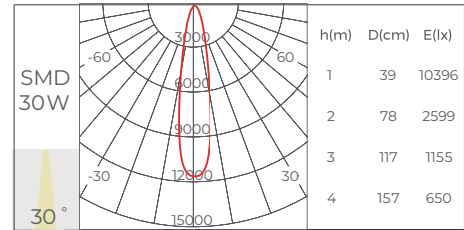

### COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 6500K

^STANDARD CCT 3000K & 4000K. OTHER CCT UPON REQUEST.

### COLOUR RENDERING

- CRI >80
- CRI >90

### DIMMING

- ON/OFF
- DALI
- 0-10V
- Other

PLEASE SPECIFY

### FINISH

- Black
- White
- Custom

PLEASE SPECIFY

BLACK BAFFLE FINISH ONLY

### LENGTH (MM)

- 600
- 1200
- 1500
- 1700
- 2300


### BEAM ANGLE

- 18° (UGR<10)
- 30° (UGR<10)
- 45° (UGR<19)

# Alta 40

## SPOTLIGHT

A40S-42WA

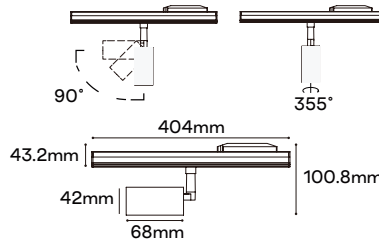

### FEATURES

- Power supply included.
- Low glare spotlight with two beam angle options.
- Horizontally and vertically adjustable.



AC Input Voltage



SDCM <3



IP20 Protection



LED Lifetime >60,000h




Low Glare Design

### PARAMETERS

Size	Power	Lumen	Efficacy
Ø42 mm	8 W	520 lm	65 lm/W

1. Physical specifications according to 4000K, Ra90, 36°, and in a white finish.
2. Module length indicates the length of the profile and the thickness of two end caps, where each end cap is 2mm thick.
3. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
4. Lumen maintenance report and IES files upon request.

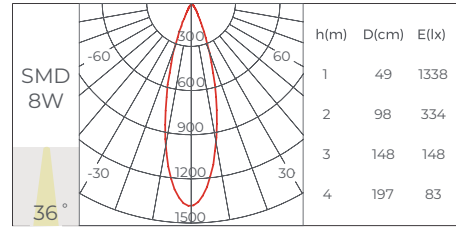

### COLOUR TEMPERATURE

- 2700K       3500K  
 3000K       4000K

^STANDARD CCT 3000K & 4000K. OTHER CCT UPON REQUEST.

### COLOUR RENDERING

- CRI >90

### DIMMING

- ON/OFF  
 DALI  
 0-10V  
 Other

PLEASE SPECIFY

### FINISH

- Black  
 White  
 Custom

PLEASE SPECIFY

### BEAM ANGLE


- 24° (UGR<13)  
 36° (UGR<10)



# Alta 40

## RECESSED DOWNLIGHT

A40S-25RB



### FEATURES

- Power supply included.
- Ø25mm double recessed downlights.
- Deep anti-glare with precise light control, and >30° shielding angle for low glare lighting.



AC Input Voltage



SDCM <3



IP20 Protection



LED Lifetime >60,000h




Low Glare Design

### PARAMETERS

Beam Angle	Power	Lumen	Efficacy
24°	6 W	390 lm	65 lm/W
45°	6 W	330 lm	55 lm/W

1. Physical specifications according to 4000K, Ra90, and 24° beam angle.
2. Module length indicates the length of the profile and the thickness of two end caps, where each end cap is 2mm thick.
3. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
4. Lumen maintenance report and IES files upon request.

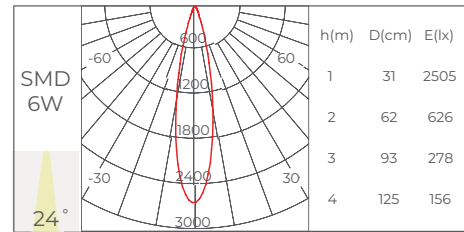

### COLOUR TEMPERATURE

- 2700K       3500K  
 3000K       4000K

^STANDARD CCT 3000K & 4000K. OTHER CCT UPON REQUEST.

### COLOUR RENDERING

- CRI >90

### DIMMING

- ON/OFF  
 DALI  
 0-10V  
 Other

PLEASE SPECIFY

### FINISH

-  Black  
  White  
  Custom

PLEASE SPECIFY

BLACK BAFFLE FINISH ONLY

### BEAM ANGLE

- 24° (UGR<10)  
 45° (UGR<19)