


# Accent 45



Track Mount



## FEATURES

- The track spotlight adopts high-quality LEDs and professional optical technology for high efficacy and high-quality LED lifetime.
- Variety of optical accessories to meet various design requirements.



220-240V AC Input



CRI >90 Standard



<3 MacAdam Ellipse



IP20 Protection



LED Lifetime >50,000h



355° Rotation



90° Tilting

## PARAMETERS

Power	CCT	Efficacy	Lumens
10 W	2700K	98 lm/W	980 lm
10 W	3000K	105 lm/W	1050 lm
10 W	3500K	107 lm/W	1070 lm
10 W	4000K	110 lm/W	1100 lm

### NOTES

1. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to ±10%.
2. Lumen maintenance report and IES files upon request.
3. All measurements are in 'mm' unless specified.

## POWER

- 10W

## COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K
- 4000K

## BEAM ANGLE

- 8°
- 19°
- 25°
- 36°
- 50°

## COLOUR RENDERING

- CRI 90
- CRI 97

\*CRI 97 upon request

## DIMMING

- ON/OFF
- DALI
- 0-10V
- TRIAC

## BODY FINISH

- Black
- White

\*Gold reflector upon request

## ACCESSORIES



Honeycomb



Elliptical Lens



Cross Screen





Barn Door

# Accent 45

## LIGHT DISTRIBUTION

3000K /10W



**Beam Angle:36°**


	h(m)	E(lx)	D(m)
<b>1</b>	1685	0.79	
<b>2</b>	421	1.59	
<b>3</b>	187	2.38	
<b>4</b>	105	3.17	
<b>5</b>	67	3.97	

Luminous flux luminaire  
869lm (EXTREME CUT OFF)

# Accent 55



Track Mount



## FEATURES

- The track spotlight adopts high-quality LEDs and professional optical technology for high efficacy and high-quality LED lifetime.
- Variety of optical accessories to meet various design requirements.



220-240V AC Input



CRI >90 Standard



<3 MacAdam Ellipse



IP20 Protection



LED Lifetime >50,000h



355° Rotation



90° Tilting

## PARAMETERS

Power	CCT	Efficacy	Lumens
15 W	2700K	133 lm/W	1995 lm
15 W	3000K	134 lm/W	2010 lm
15 W	3500K	139 lm/W	2085 lm
15 W	4000K	142 lm/W	2130 lm

### NOTES

1. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to ±10%.
2. Lumen maintenance report and IES files upon request.
3. All measurements are in 'mm' unless specified.

## POWER

- 15W

## COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K
- 4000K

## BEAM ANGLE

- 22°
- 32°
- 42°
- 50°

## COLOUR RENDERING

- CRI 90
- CRI 97

\*CRI 97 upon request

## DIMMING

- ON/OFF
- DALI
- TRIAC

## BODY FINISH

- Black
- White

\*Gold reflector upon request

## ACCESSORIES



Honeycomb



Elliptical Lens





Cross Screen



Barn Door

## LIGHT DISTRIBUTION



### 3000K /15W



**Beam Angle:22°**

h(m)	E(lx)	D(m)
1	6812	0.39
2	1703	0.78
3	757	1.17
4	426	1.56
5	273	1.95



Luminous flux luminaire  
1232lm (EXTREME CUT OFF)



**Beam Angle:32°**

h(m)	E(lx)	D(m)
1	4504	0.58
2	1126	1.16
3	500	1.74
4	281	2.32
5	180	2.90



Luminous flux luminaire  
1337lm (EXTREME CUT OFF)



**Beam Angle:42°**

h(m)	E(lx)	D(m)
1	2556	0.79
2	639	1.59
3	284	2.38
4	160	3.18
5	102	3.97

Luminous flux luminaire  
1303lm (EXTREME CUT OFF)



**Beam Angle:50°**

h(m)	E(lx)	D(m)
1	1565	1.04
2	391	2.07
3	174	3.11
4	98	4.14
5	63	5.18


Luminous flux luminaire  
1237lm (EXTREME CUT OFF)

# Accent 69

one'au



Track Mount



## FEATURES

- The track spotlight adopts high-quality LEDs and professional optical technology for high efficacy and high-quality LED lifetime.
- Variety of optical accessories to meet various design requirements.



220-240V  
AC Input



CRI > 90  
Standard



< 3 MacAdam  
Ellipse



IP20  
Protection



L80  
LED Lifetime  
> 50,000h



355°  
Rotation



90°  
Tilting

## POWER

- 20W
- 30W

## COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K
- 4000K

## BEAM ANGLE

- 15°
- 25°
- 36°
- 50°

## COLOUR RENDERING

- CRI 90
- CRI 97

\*CRI 97 upon request

## DIMMING

- ON/OFF
- DALI
- TRIAC

## BODY FINISH

-  Black
-  White

\*Gold reflector upon request

## ACCESSORIES



Honeycomb



Elliptical Lens



Cross Screen



Barn Door

## PARAMETERS





Power	CCT	Efficacy	Lumens
20 W	2700K	128 lm/W	2560 lm
20 W	3000K	134 lm/W	2680 lm
20 W	3500K	139 lm/W	2780 lm
20 W	4000K	142 lm/W	2840 lm
30 W	2700K	128 lm/W	3840 lm
30 W	3000K	134 lm/W	4020 lm
30 W	3500K	139 lm/W	4170 lm
30 W	4000K	142 lm/W	4260 lm

### NOTES





1. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to  $\pm 10\%$ .
2. Lumen maintenance report and IES files upon request.
3. All measurements are in 'mm' unless specified.

## LIGHT DISTRIBUTION

### 3000K /20W

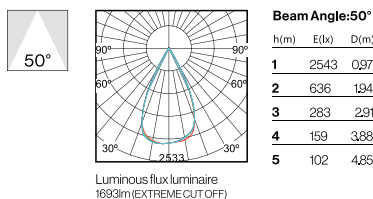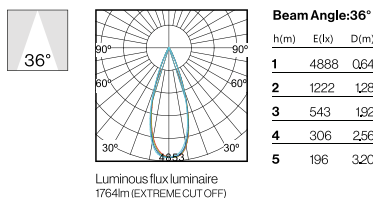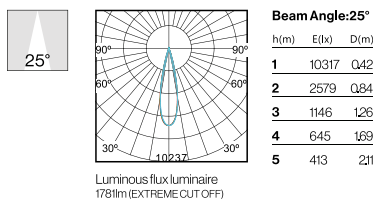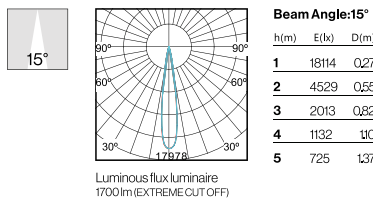

### 3000K /30W

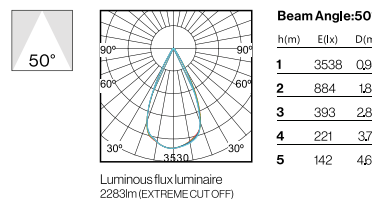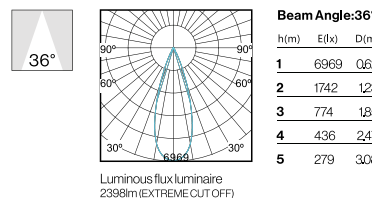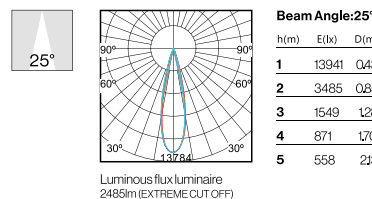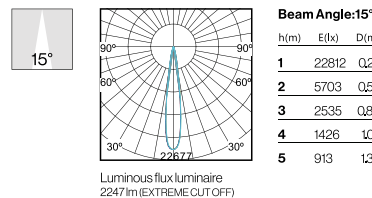


# Accent 82

one'au



Track Mount



## FEATURES

- The track spotlight adopts high-quality LEDs and professional optical technology for high efficacy and high-quality LED lifetime.
- Variety of optical accessories to meet various design requirements.



220-240V  
AC Input



CRI >90  
Standard



<3 MacAdam  
Ellipse



IP20  
Protection



L80  
LED Lifetime  
>50,000h



355°  
Rotation



90°  
Tilting

## POWER

- 35W
- 42W

## COLOUR TEMPERATURE

- 2700K
- 3000K
- 3500K
- 4000K

## BEAM ANGLE

- 15°
- 23°
- 36°
- 50°

## COLOUR RENDERING

- CRI 90
- CRI 97

\*CRI 97 upon request

## DIMMING

- ON/OFF
- DALI
- 0-10V
- TRIAC

## BODY FINISH

-  Black
-  White

\*Gold reflector upon request

## ACCESSORIES



Honeycomb



Elliptical Lens



Cross Screen



Barn Door

## PARAMETERS





Power	CCT	Efficacy	Lumens
35 W	2700K	132 lm/W	4620 lm
35 W	3000K	138 lm/W	4830 lm
35 W	3500K	143 lm/W	5005 lm
35 W	4000K	146 lm/W	5110 lm
42 W	2700K	132 lm/W	5544 lm
42 W	3000K	138 lm/W	5796 lm
42 W	3500K	143 lm/W	6006 lm
42 W	4000K	146 lm/W	6132 lm

### NOTES

- The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to ±10%. Lumen maintenance report and IES files upon request.
- 
- All measurements are in 'mm' unless specified.

## LIGHT DISTRIBUTION

### 3000K /35W

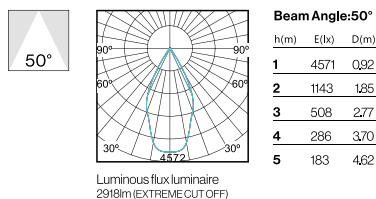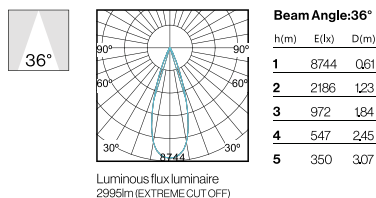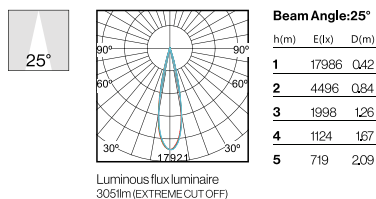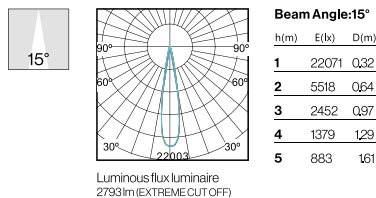

### 3000K /42W

