FLEXIBLE WALL WASHER

Catena Grazer Nano

SINGLE CCT

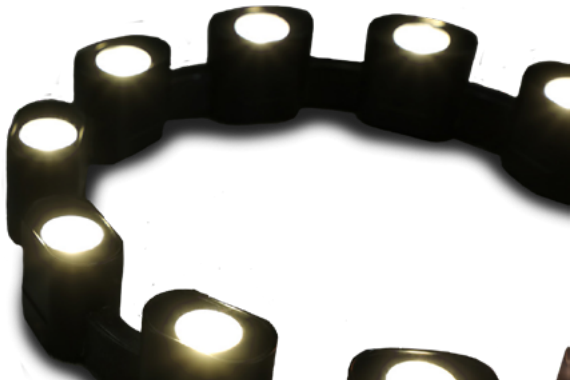

Surface Mount

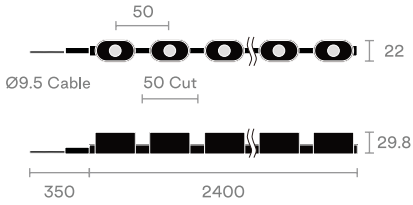

FEATURES

- Side-bending flexible wall grazer.
- IP67 waterproof grade; indoor and outdoor applications.
- Excellent weather resistance, UV-resistant PC lens, acid and alkali corrosion resistance.
- One LED module cutting length for convenient and flexible design solutions.

24V DC Input
CRI>80
<3 MacAdam Ellipse
IP67 Protection
LED Lifetime >50,000h
UV Resistant
20 LEDs/m
50mm Cut Length
Indoor/ Outdoor

LENGTH

■ 2400 mm

COLOUR TEMPERATURE

☐ 2700K
☐ 3000K
☐ 4000K
☐ 5000K

BEAM ANGLE

☐ 20°
☐ 30°
☐ 40°
☐ 15x40°

DIMMING

LED Drivers sold separately

☐ Non-Dim
☐ DALI
☐ Phase
☐ 0-10V

FINISH

Black

ACCESSORIES

☐ Mounting Clip
☐ Flexible Channel

CABLE ENTRY

☐ Straight
☐ Side
☐ Bottom

info@luxfx.com.au
03 9417 6986

OAU_MLWE3021_DS25V6

© 2025 OneAU brand by Lux FX

Catena Grazer Nano

SINGLE CCT

PARAMETERS

Power	CCT	20°	30°	40°	15x40°
36 W/m	2700K	2235 lm/m	2270 lm/m	2055 lm/m	1945 lm/m
36 W/m	3000K	2630 lm/m	2670 lm/m	2420 lm/m	2280 lm/m
36 W/m	4000K	3060 lm/m	3140 lm/m	2850 lm/m	2520 lm/m
36 W/m	5000K	3060 lm/m	3140 lm/m	2850 lm/m	2520 lm/m

NOTES
1. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
2. Lumen maintenance reports and IES files upon request.

MOUNTING CHANNELS

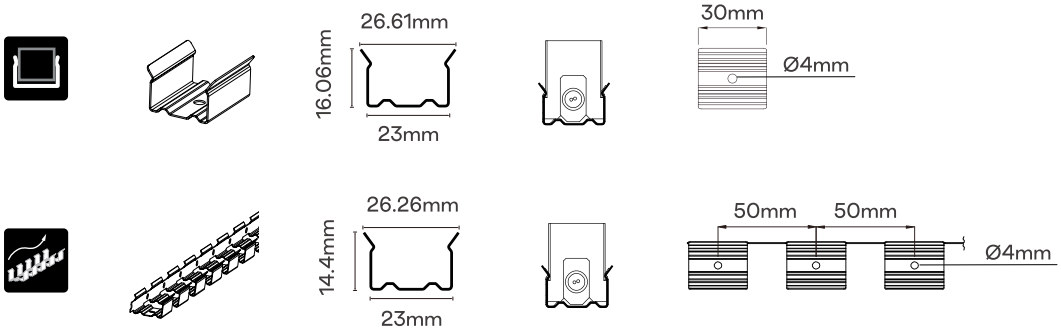

CABLE ENTRY

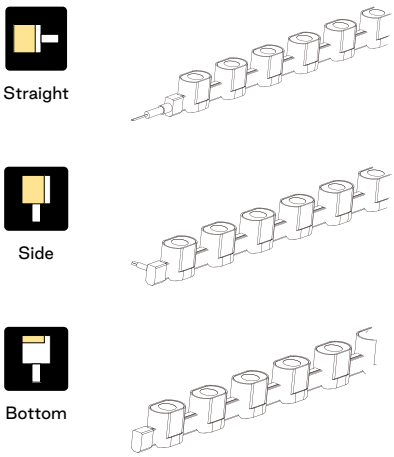

© 2025 OneAU brand by Lux FX

FLEXIBLE WALL WASHER

Catena Grazer Nano

RGBW

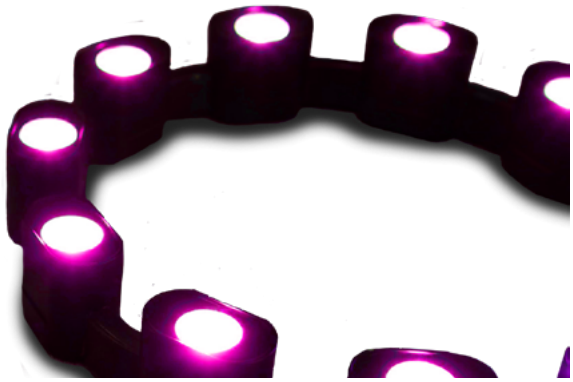

Surface Mount

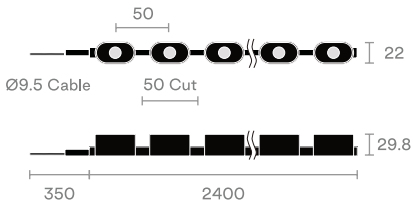

FEATURES

- Side-bending flexible wall grazer.
- IP67 waterproof grade; indoor and outdoor applications.
- Excellent weather resistance, UV-resistant PC lens, acid and alkali corrosion resistance.
- Integrated RGBW four-colour LED chip.

24V DC Input | CRI>80 | <3 MacAdam Ellipse | IP67 Protection | LED Lifetime >50,000h

UV Resistant | 20 LEDs/m | 50mm Cut Length | Indoor/ Outdoor

LENGTH

■ 2400 mm

COLOUR TEMPERATURE

■ RGB-W
- ☐ 2700K
- ☐ 3000K
- ☐ 4000K

BEAM ANGLE

- ☐ 30°
- ☐ 40°
- ☐ 15x40°

DIMMING

LED Drivers sold separately

- ☐ PWM
- ☐ DALI

FINISH

■ Black

ACCESSORIES

☐ Mounting Clip

☐ Flexible Channel

CABLE ENTRY

☐ Straight

☐ Side

☐ Bottom

info@luxfx.com.au
03 9417 6986

OAU_MLWE3021_DS25V6

© 2025 OneAU brand by Lux FX

Catena Grazer Nano

RGBW

PARAMETERS

Power	CCT	30°	40°	15x40°
36 W/m	Red	285 lm/m	230 lm/m	215 lm/m
36 W/m	Green	580 lm/m	470 lm/m	440 lm/m
36 W/m	Blue	200 lm/m	160 lm/m	150 lm/m
36 W/m	4000K	450 lm/m	365 lm/m	340 lm/m

NOTES
1. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
2. Lumen maintenance reports and IES files upon request.

MOUNTING CHANNELS

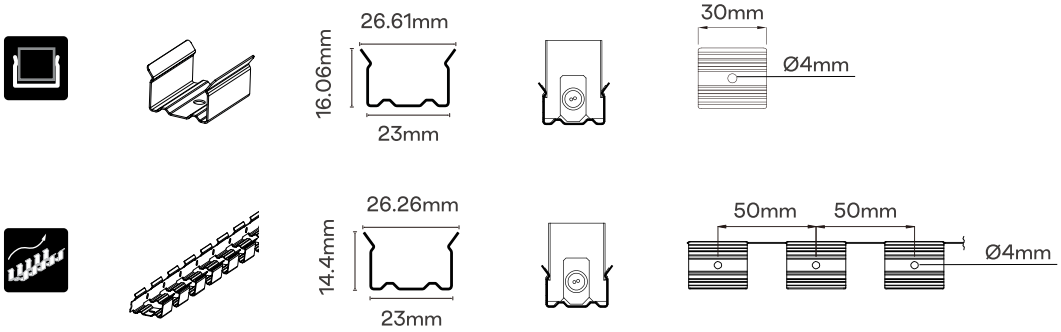

CABLE ENTRY

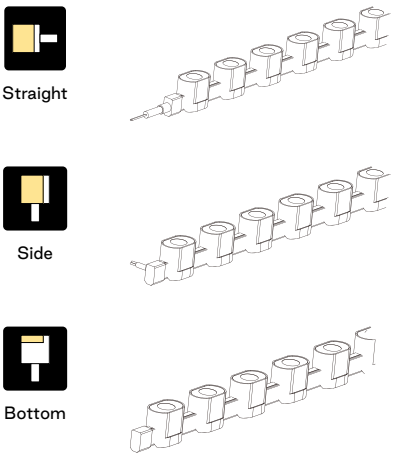

© 2025 OneAU brand by Lux FX

FLEXIBLE WALL WASHER

Catena Grazer Nano

RGBW DMX

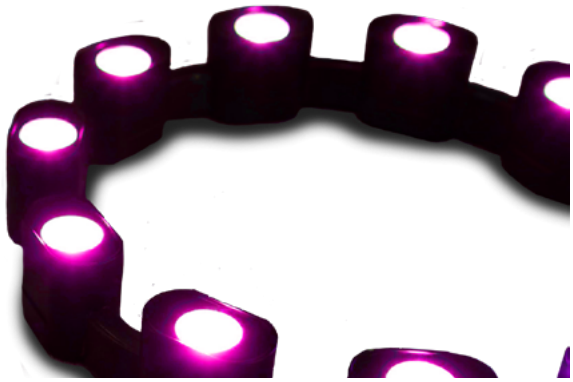

Surface Mount

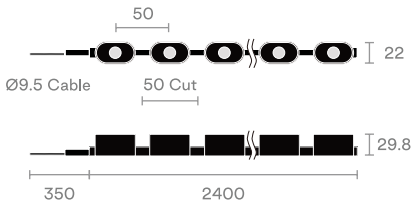

FEATURES

- Side-bending flexible wall grazer.
- IP67 waterproof grade; indoor and outdoor applications.
- Excellent weather resistance, UV-resistant PC lens, acid and alkali corrosion resistance.
- Integrated RGBW four-colour LED chip.
- DMX512 control IC-SM18522.
- Varying colour programs can be controlled by 4 pixels/1.2m.

24V DC Input | CRI>80 | <3 MacAdam Ellipse | IP67 Protection | LED Lifetime >50,000h

UV Resistant | 20 LEDs/m | 50mm Cut Length | Indoor/ Outdoor

LENGTH

■ 2400 mm

COLOUR TEMPERATURE

■ RGB-W
- ☐ 2700K
- ☐ 3000K
- ☐ 4000K

BEAM ANGLE

☐ 20° ☐ 40°
☐ 30° ☐ 15x40°

DIMMING

LED Drivers sold separately

■ DMX

FINISH

Black

ACCESSORIES

☐ Mounting Clip ☐ Flexible Channel

CABLE ENTRY

☐ Straight ☐ Side ☐ Bottom

info@luxfx.com.au
03 9417 6986

OAU_MLWE3021_DS25V6

© 2025 OneAU brand by Lux FX

Catena Grazer Nano

RGBW DMX

PARAMETERS

Power	CCT	20°	30°	40°	15x40°
36 W/m	Red	155 lm/m	170 lm/m	153 lm/m	120 lm/m
36 W/m	Green	335 lm/m	365 lm/m	330 lm/m	250 lm/m
36 W/m	Blue	100 lm/m	110 lm/m	100 lm/m	75 lm/m
36 W/m	4000K	270 lm/m	295 lm/m	270 lm/m	205 lm/m

NOTES
1. The listed are the typical values. Actual value may differ; changes may be made without notice. The tolerance of output data can vary up to 10%.
2. Lumen maintenance reports and IES files upon request.

MOUNTING CHANNELS

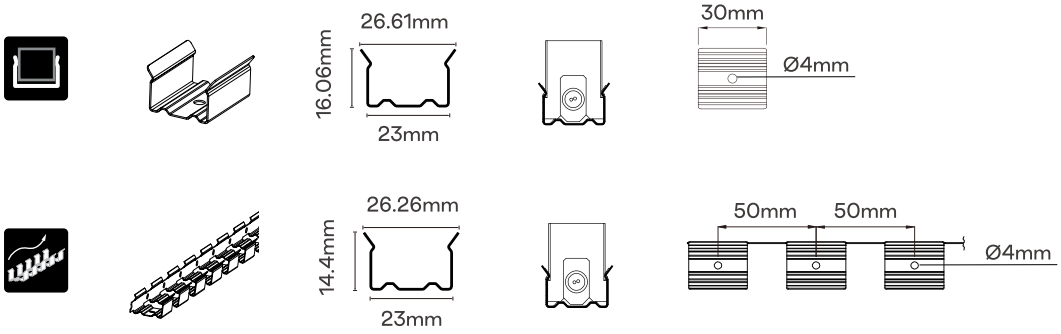

CABLE ENTRY

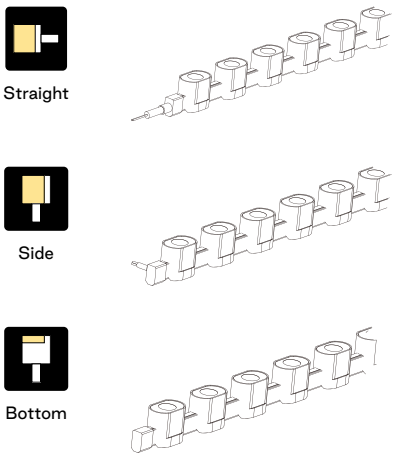

© 2025 OneAU brand by Lux FX